

MAILNUT 3X™ DIRECTIONS

1.) FOR BEST RESULTS

For MAILNUT 3X™ to function properly, mailbox door must open and close freely.

Be sure the MAILNUT 3X™ mounting pads and catch plate surface areas are clean, dry, and free of loose paint and debris before applying mounting pads.

Prior to attaching MAILNUT 3X™ clean each surface with enclosed alcohol pad* *Important note:* If paint and/or finish is flaking, corroding, or raised on the mounting pad surface areas use enclosed scraper/sand paper to remove debris and restore to a clean metal surface and then wipe clean with enclosed alcohol pad prior to attaching MAILNUT3X™ and mounting pads. (Use protective eye wear and gloves while removing loose coatings/paint etc. with sandpaper and/or scraper. *Discard alcohol pads, scraper, and sandpaper properly after use.)

Apply enclosed adhesive materials in temperatures between 40-85 degrees Fahrenheit. (4.4-29.4 degrees Celsius)

2). DIRECTIONS

1). MAILNUT 3X™ and 3M Dual Lock™ mounting pads are to be attached on the inside wall of the mailbox opposite the postal flag at the highest point with a flat surface. The metal catch plate is to be installed on the inside of the mailbox door at a location that is smooth and flat with adequate space for the catch plate to fit directly opposite the mounting pad when the mailbox door is closed. With a pencil or marker, mark a line at the location on the outside of the mailbox opposite the interior highest point flat surface. Then with the door closed mark the outside edge of the mailbox door near the line on the mailbox. (See Figure 1 on back of this page).

2). Peel off the permanent stick-on* protective liners from the back of each 1" x 3" 3M™ Dual Lock™ mounting pad and attach them inside on the flat cleaned surface near the pencil mark with the shorter edge of the 3M™ Dual Lock™ pad flush with the outside edge of the of the mailbox wall and with one strip meeting above/below the other creating a 2" x 3" mounting pad. Press firmly into place for 30 seconds. (See Figure 2 on back of this page). * Stick-on has very fast and high bonding strength. First attempt at application should be permanent.

3). After surface is clean, smooth, and free of any loose coatings, Peel off the protective liner from the back of the rectangular metal catch plate and attach it to the outer edge of the raised surface on the backside of the mailbox door near the pencil mark with the red edge of the catch plate hanging over the raised door surface assuring MAILNUT 3X™ magnet will make contact when mailbox door is closed. (See Figure 3 on back side of this page). Press catch plate firmly for 30 seconds. * Stick-on has very fast and high bonding strength first application should be permanent. ALLOW 4 OR MORE HOURS for catch plate adhesive to adhere to mailbox door BEFORE attaching MAILNUT 3X™ to mounting pads or closing mailbox door with MAILNUT 3X™ in place. (See Figure 4 on back of this page).

4). ***Do not REMOVE Vinyl Protective Magnet Cover from Cylinder Magnet on MAILNUT 3X. Grip MAILNUT 3X™ firmly with fingers on outside edges while attaching it to mounting pad.*** MAILNUT 3X™ magnet will have very strong attraction to mailboxes/steel objects. Carefully attach MAILNUT 3X™ to the 3M™ Dual Lock™ mounting pads so the tip of magnet is positioned inside the mailbox at a point where the raised portion of the backside of the mailbox door (catch plate) will make contact**. Press the back side of the MAILNUT 3X firmly onto mounting pads so it interlocks tightly with the 3M™ Dual Lock™ mounting pads on the inside wall of your mailbox. *****Make note of the thickness of the raised surface on the backside of the mailbox door where the catch plate is mounted and make certain the tip of the MAILNUT 3X™ magnet is back far enough from the outer edge of the mailbox wall so the door closes completely and the catch plate contacts the magnet tip.***

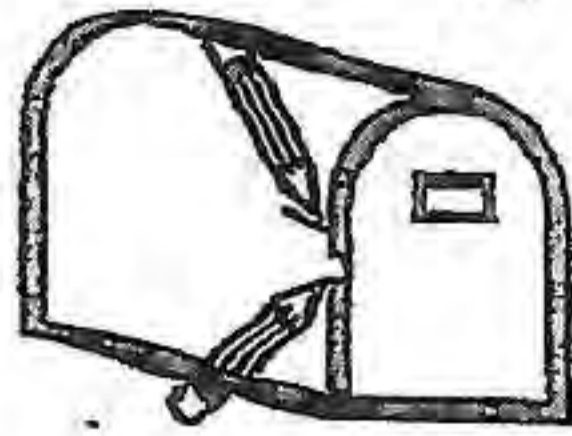


Figure 1


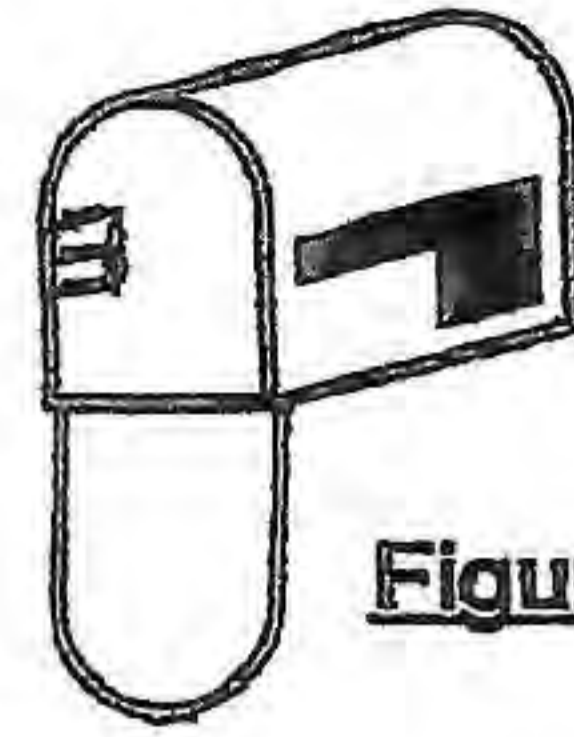


Figure 2


Gaines Keystone Series® and Whitehall™ Capitol Mailboxes

Catch Plate Application

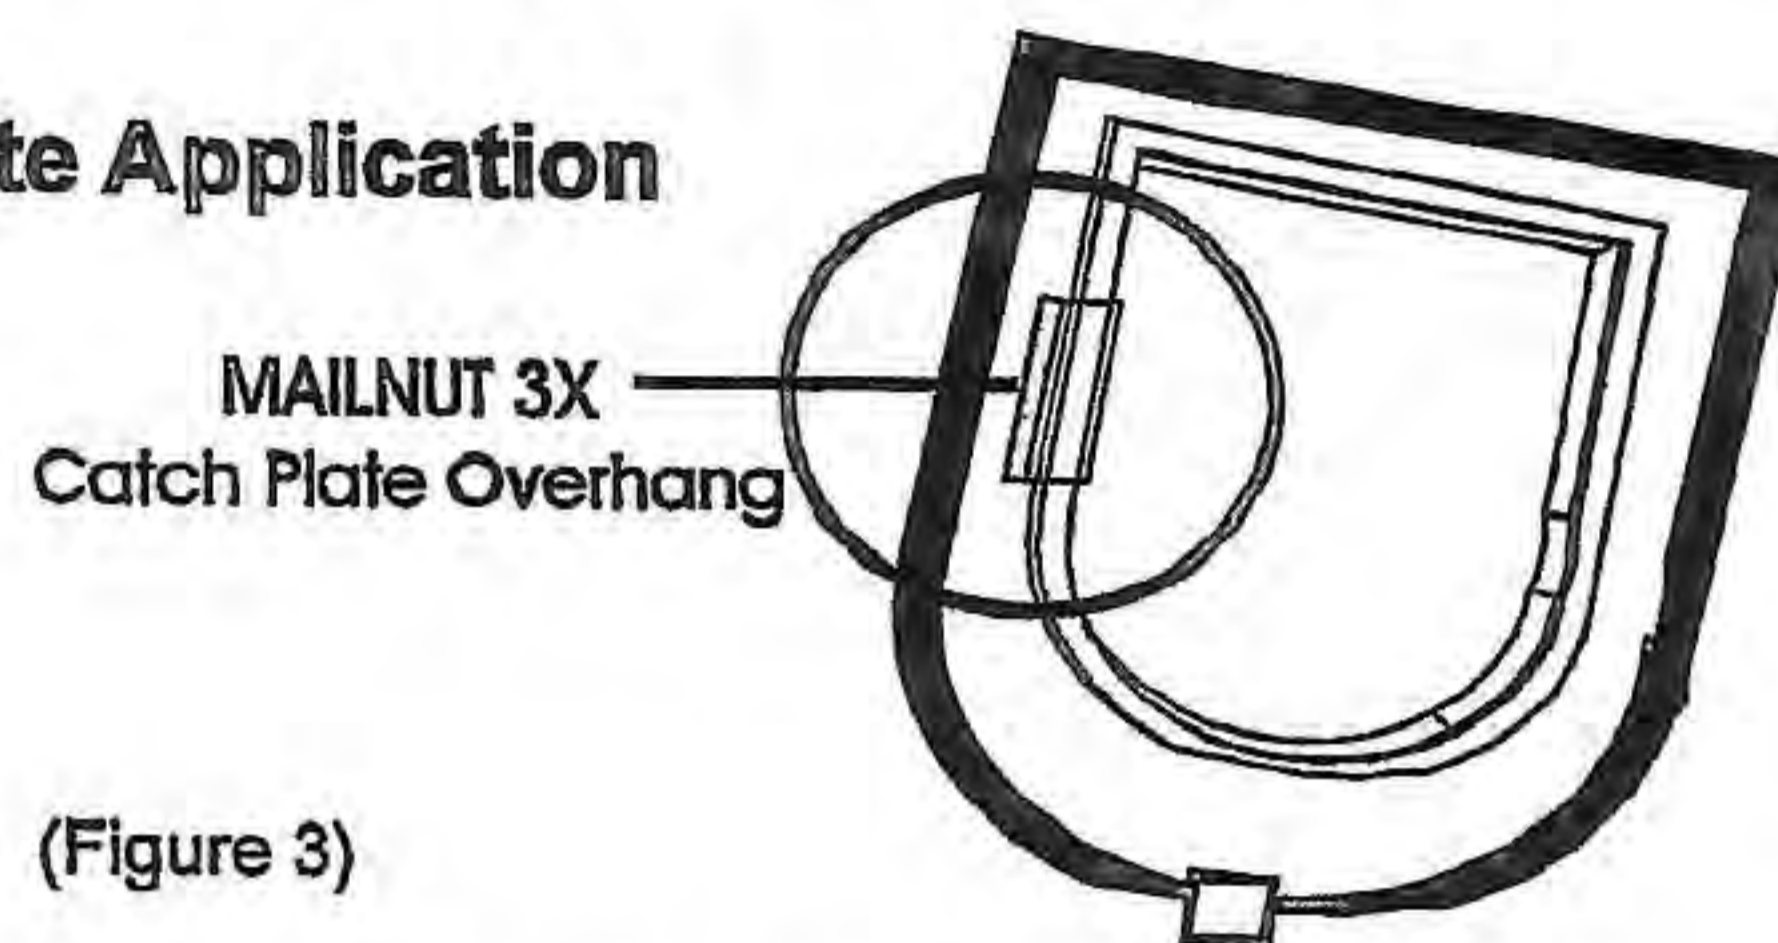

*After attaching catch plate allow 4 or more hours for catch plate adhesive to adhere to mailbox door BEFORE closing door and/or allowing magnet to make any contact with catch plate.

Please Note: In rare cases where excessive corrosion or uneven surfaces exist on the inside of the mailbox door, our screw on catch plate may have to be purchased. Visit: MAILNUT.COM

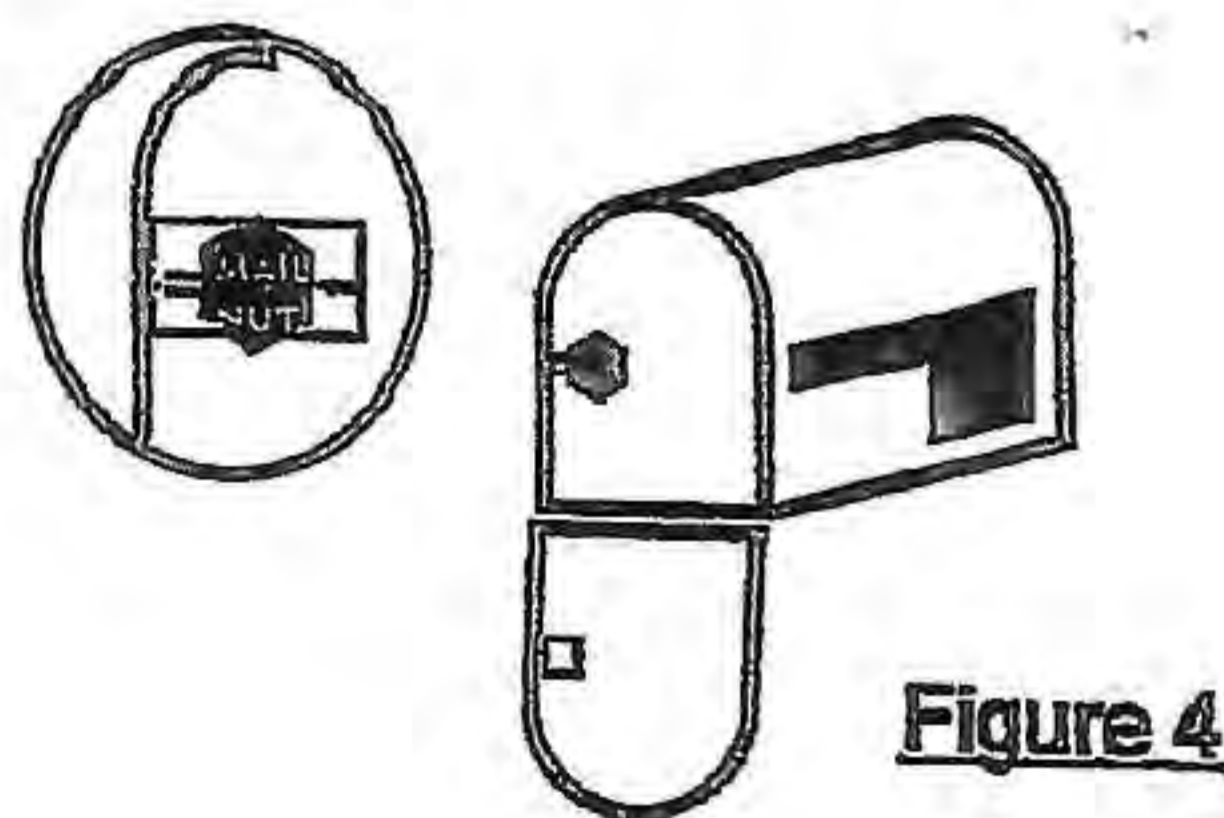

For Customer Support or Comments E-mail, Info@MAILNUT.com or call 1-833-MAILNUT between 9:00-5:00 CST M-F Send Written Inquiries to: O'TOOP Products, LLC Attention: MAILNUT PO Box 146 New Auburn WI 54757

MAILNUT™ and the product configuration of the product contained herein are trademarks of O'TOOP Products, LLC Solely distributed by US Post® and its affiliates. *Dual Lock™ and 3M™ are trademarks of the 3M Company

Copyright 2008-2023 O'TOOP PRODUCTS, LLC all rights reserved